

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-86180-18VV (F Blade)

September 19, 2019

## GT-86180-18VV (F Blade)

### Information

Model Number GT-86180-18VV (F Blade)

Description GT-86180-18VV (F Blade), ITE Power Supply, Wall Plug-in, Regulated Switchmode AC-DC Power Supply AC Adaptor, , Input Rating: 100-240V~, 50-60Hz, Blade Options for F- Series Wall Plug-in Power Supplies, Output Rating: 18 Watts, Power rating with convection cooling (W) , 12VV in 0.1V increments, Approvals: EAC; PSE;

Model Picture



Agency Documents <http://en.globtek.com/safety-agency-documents-pending/>

CE Declaration [https://www.globtek.com/pdf/ec\\_declaration/a0Oa000000MmpASEAZ](https://www.globtek.com/pdf/ec_declaration/a0Oa000000MmpASEAZ)

RoHS/RoHS2 Declaration [https://www.globtek.com/pdf/rohs\\_cert/a0Oa000000MmpASEAZ](https://www.globtek.com/pdf/rohs_cert/a0Oa000000MmpASEAZ)

REACH Declaration [https://www.globtek.com/pdf/iso\\_certificates/REACH.pdf](https://www.globtek.com/pdf/iso_certificates/REACH.pdf)

Conflict Minerals Declaration <https://www.globtek.com/pdf/conflict-minerals.pdf>

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-86180-18VV (F Blade)

September 19, 2019

**Model Parameters**


Type	Wall Plug-in
Technology	Regulated Switchmode AC-DC Power Supply AC Adaptor
Category	ITE Power Supply
Input Voltage	100-240V~, 50-60Hz
I/P Amps (A)	1A
Wattage (W)	18.0
Vout Range (V)	12V
Efficiency Level	VI
Ingress Protection	IPX0
Size (mm)	73.5(L) *35(W) *53(H)

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-86180-18VV (F Blade)

September 19, 2019

ENCLOSURE

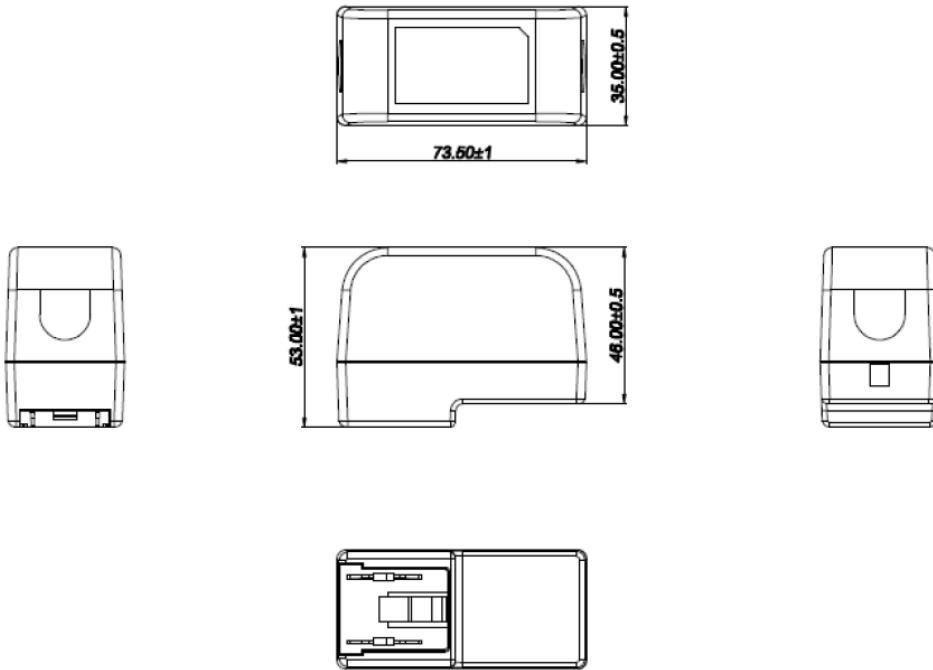

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-86180-18VV (F Blade)

September 19, 2019

**RATING TABLE**

Model Number	Voltage(V)	Amps(A)	Watts(W)	RFQ
GT-86180-181212	12 V	1.5	18.00	<a href="#">RFQ</a>

**SPECIFICATIONS****A) ELECTRICAL SPECIFICATIONS:**

01. Input Voltage: Specified 90-264 Vac, Nameplate rated: 100-240Vac
02. Input Frequency: Specified 47-63 Hz, Nameplate rated 50-60Hz
03. Line Regulation:  $\pm 5\%$
04. Load regulation:  $\pm 5\%$
05. Ripple and Noise (Vp-p): 300 mVp-p maximum, At 20 MHz, and output parallel with 0.1uF & 47uF capacitors to ground, Temperature at 25 °C, and nominal AC input voltage
06. Efficiency: Compliant with Efficiency Level VI and CoC Tier 2 standards
07. No Load Standby Power: <0.075W @ 230Vac
08. Turn-ON Delay: 3 Seconds maximum

**B) PROTECTION**

01. Over-Voltage: 10V maximum
02. Over current protection: 1.5A maximum with auto-recovery function
03. Short Circuit: The adapter shall not be damaged by short the DC output to Ground.

**C) SAFETY**

01. Dielectric Withstand Voltage: Primary To Secondary: 3000VAC 10mA 1minute or 4242VDC 10mA 1minute
02. Leakage Current: 20uA maximum, at nominal AC input voltage and frequency

**D) EMC**

01. Emissions, per EN 55032, EN 61000-6-3, EN 61000-6-4
  - Conducted Emissions: Class B, FCC Part 15, Class B
  - Radiated Emissions: Class B, FCC Part 15, Class B
02. Line Frequency Harmonics EN61000-3-2, Class A
03. Voltage Fluctuations/Flicker EN61000-3-3
04. Immunity, per EN 55024, EN 61000-6-1, EN 61000-6-2
  - Static Discharge Immunity EN61000-4-2, 4kV Contact Discharge, 8kV air discharge
  - Radiated RF Immunity EN61000-4-3, 3V/m 80-1000MHz, 80% 1KHz AM.
  - EFT/Burst Immunity EN61000-4-4, 1kV/100kHz.
  - Line Surge Immunity EN61000-4-5, 1kV differential, 2kV common-mode
  - Conducted RF Immunity EN61000-4-6, 3Vrms, 80% 1KHz AM
  - Power Frequency Magnetic Field Immunity EN61000-4-8, 1A/m
  - Voltage Dip Immunity EN61000-4-11, Criteria

**E) OTHER:**

01. MTBF: 200,000 Hours @ 25°C ambient temperature
02. Operating Temperature: 0°C to 40°C ambient temperature
03. Humidity: 0% to 90% relative humidity
04. Storage Temperature: -20°C to 60°C
05. Cooling: natural convection cooling
06. ROHS 2: Complies with EU 2011/65/EU and China SJ/T 11363-2006

**F) ENCLOSURE**

01. Housing: High impact plastic, 94V0 polycarbonate, non-vented
02. Markings: Label and/or Pad Printed and/or Molded in the case


Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-86180-18VV (F Blade)

September 19, 2019

DERATING CURVE

**Typical External  
Power Supply Derating Curve**  
(For Efficiency Level V and Efficiency Level VI Products)

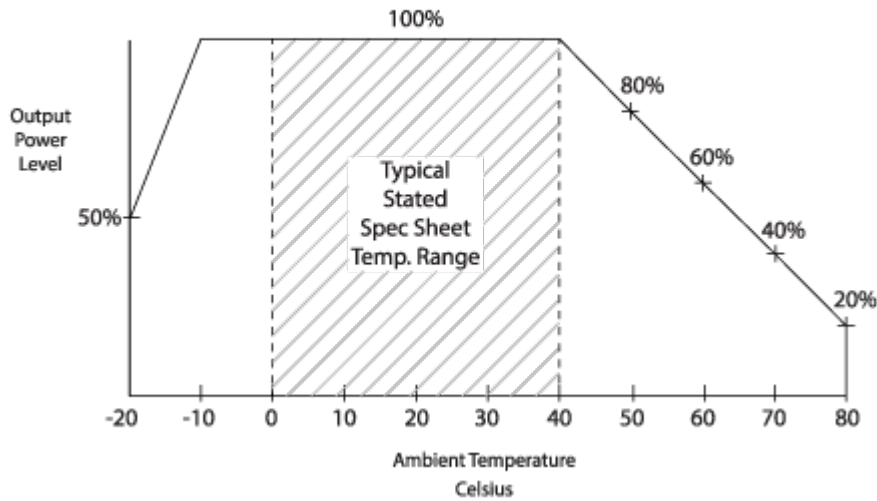

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-86180-18VV (F Blade)

September 19, 2019

### Input Configuration

Description Blade Options for F- Series Wall Plug-in Power Supplies



INPUT CONNECTOR: F-Socket

(below are available blades configurations which are "not included" (unless stated above); can be purchased separately, package with power supply or as a separate "F-KIT" if specified

- 01. United States / Canada / Japan NEMA 1-15P configuration: NA 2 blades, Class II; US/CA/JP P/N: F-NA(R)
- 02. European CEE 7/16 configuration: Europlug 2 pins, Class II; EU P/N: F-EU(R)
- 03. UK BS 1363 configuration: UK 3 blade with dummy Ground, Class II; GB P/N: F-UK(R)
- 04. Australian AS 3112 configuration: SAA 2 blade, Class II; AU P/N: F-SAA(R)
- 05. Brazilian NBR6147 configuration: 2 pins, Class II;SIMILAR TO IEC TYPE C BR P/N: F-BR(R)

F-KIT: 1,2,3,4,5 above

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-86180-18VV (F Blade)

September 19, 2019

**Output Configuration**

Common output connector options:


 L Type (Coaxial  
5.5x2.5mm plug)

 C Type (Coaxial  
5.5x2.1mm plug)

 K Type (Coaxial  
3.5x1.3mm plug)

 LL Type (5.5x2.5mm  
Locking 760k type)

 CL Type (5.5x2.1mm  
Locking S761k type)

 ML2 Type (Molex  
housing 43025-0200)


YL3 Type (KPPX-3P)



YL4 Type (KPPX-4P)


 EJ1/2/3/4/5 (EIAJ  
RC-5320A type  
connectors)


MSB Type (Micro USB)


 USBC Type (USB Type  
C)

 Inquire for custom  
design

 For a comprehensive list of options, [click here](#)

Contact GlobTek for your specific requirements or custom solutions.





Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-86180-18VV (F Blade)

September 19, 2019

## Approvals

Logo	Description
	Declaration ДС № EAЭС N RU Д-US.KA01.B.10453_19 Custom Union of Russia, Belarus and Kazakhstan <a href="http://www.globtek.com/redirect?!loc=gost-certificate-eac-declaration">http://www.globtek.com/redirect?!loc=gost-certificate-eac-declaration</a>
	JAPAN TUV R-PSE, Cert. No. JD 50313285, to J60950-1(H26) , J55022(H22),J3000(H25)[15V or less]. Please reference the following website for guidelines on PSE regulations: <a href="http://en.globtek.com/importing-ite-and-medical-power-supplies-ac-adaptors-to-japan/">http://en.globtek.com/importing-ite-and-medical-power-supplies-ac-adaptors-to-japan/</a>