

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-91114-06VV-PP

May 20, 2019

GT-91114-06VV-PP

Information

Model Number GT-91114-06VV-PP

Description GT-91114-06VV-PP, ITE Power Supply, Potted/Encapsulated in plastic housing, Regulated Switchmode AC-DC Power Supply AC Adaptor, , Input Rating: 100-240V~, 50-60 Hz, Solder Pins for Line & Neutral, 0.64 mm square pins, 10 mm long, Output Rating: 6 Watts, Power rating with convection cooling (W) , 3.3-48V in 0.1V increments, Approvals: Level V; Double Insulation; WEEE; RoHS; China RoHS; CE;

Model Picture



Agency

Documents <http://www.globtek.info/certs/GT-91114/>

CE

EC-Declaration https://www.globtek.com/pdf/ec_declaration/a0030000007P7ZtEAK

RoHS/RoHS2

Declaration https://www.globtek.com/pdf/rohs_cert/a0030000007P7ZtEAK

REACH

Declaration https://www.globtek.com/pdf/iso_certificates/REACH.pdf

Conflict

Minerals <https://www.globtek.com/pdf/conflict-minerals.pdf>

Declaration

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-91114-06VV-PP

May 20, 2019

Model Parameters

Type	Potted/Encapsulated in plastic housing
Technology	Regulated Switchmode AC-DC Power Supply AC Adaptor
Category	ITE Power Supply
Input Voltage	100-240V~, 50-60 Hz
I/P Amps (A)	0.6 A
Wattage (W)	6.0
Vout Range (V)	3.3-48
Efficiency Level	V
Ingress Protection	IP68
Size (mm)	55.4 x 52.0 x 23.5

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-91114-06VV-PP


May 20, 2019

ENCLOSURE

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-91114-06VV-PP


May 20, 2019

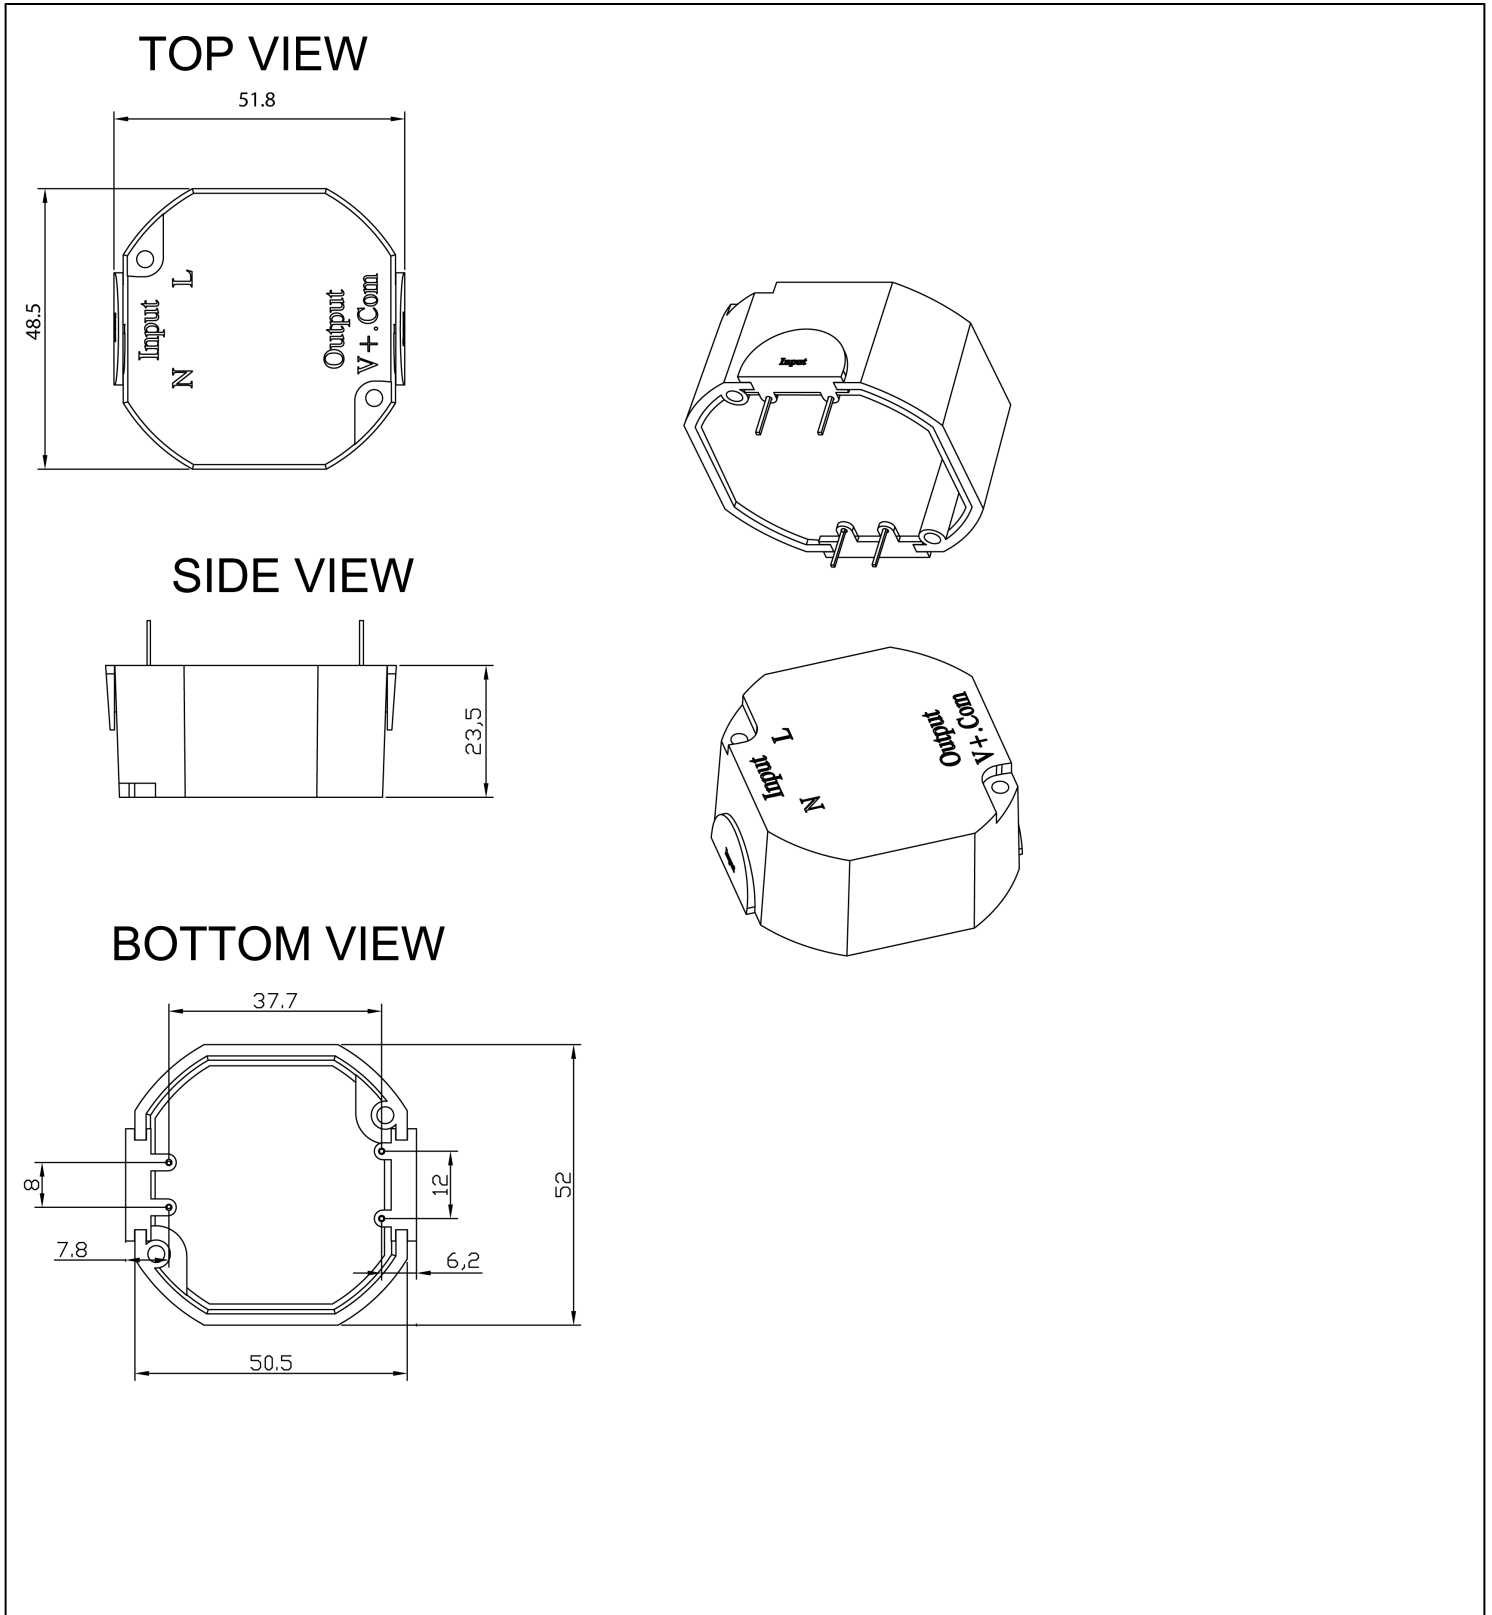

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-91114-06VV-PP

May 20, 2019

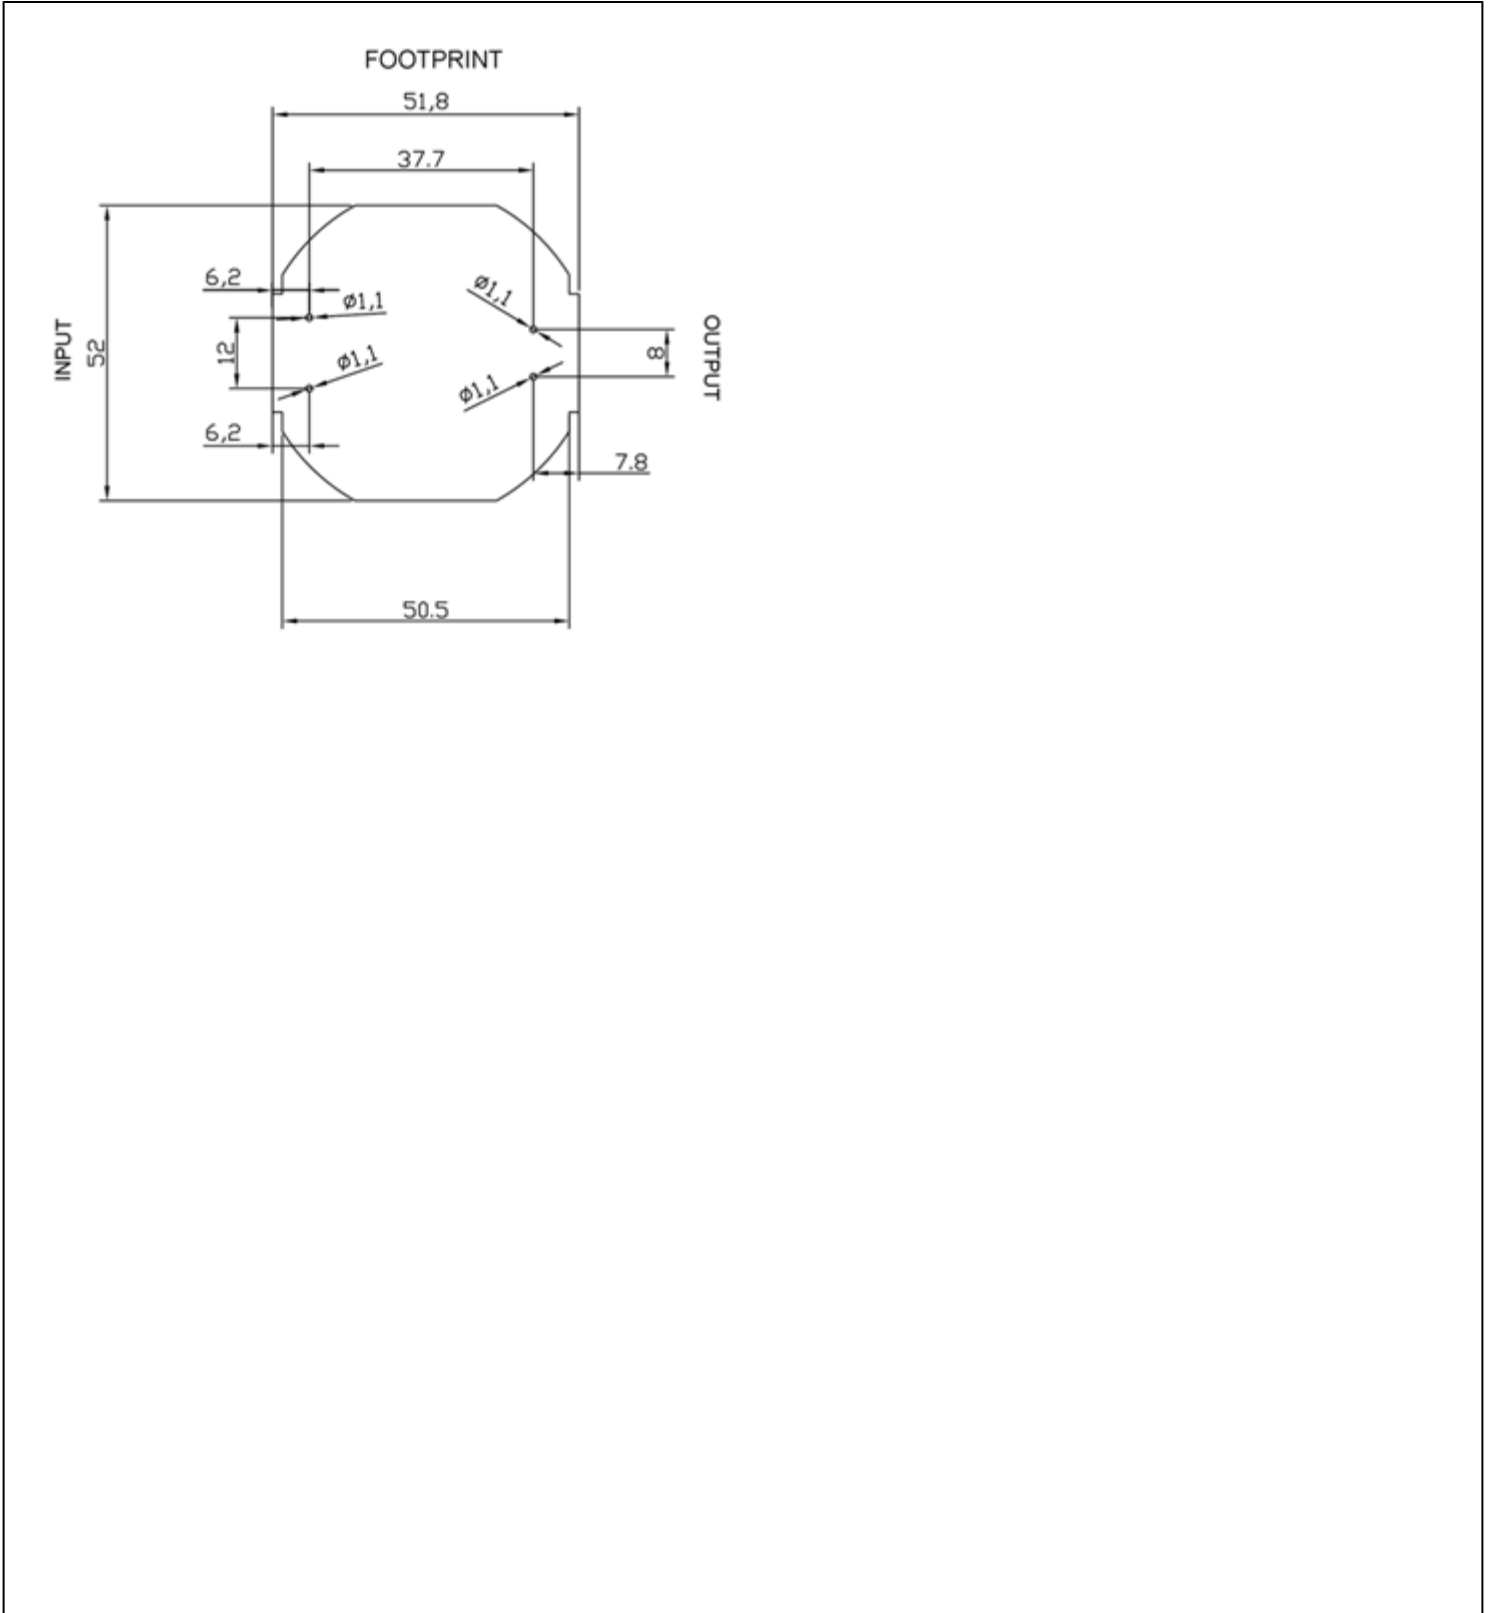

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-91114-06VV-PP

May 20, 2019

RATING TABLE

Model Number	Voltage(V)	Amps(A)	Watts(W)	RFQ
GT-91114-061212	12 V	0.5	6.00	RFQ

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-91114-06VV-PP

May 20, 2019

SPECIFICATIONS

A) ELECTRICAL SPECIFICATIONS:

01. Input Voltage: Specified 90-264 Vac, Nameplate rated: 100-240Vac
02. Input Frequency: Specified 47-63 Hz, Nameplate rated 50-60Hz
03. Output Regulation: +/- 5% measured at the output connector
04. Line Voltage Regulation: +/- 5% typical measured at full load
05. Output Ripple (Vp-p): +/-1% or 50 mV whichever is greater, measured at 20 MHz bandwidth with 0.1 uf ceramic capacitor in parallel with 10 uf electrolytic capacitor connected at the end of the output connector at nominal line
06. Turn-ON/OFF Overshoot: 4% maximum, 500uS typical recovery time for 25% to 50% step load
07. Turn-ON Delay: 3000 mS, maximum @ full load, nominal line
08. Hold-Up Time: 8 mS typical @ nominal input voltage and full load
09. Inrush Current: 30A maximum cold start @ 240Vac input
10. Switching Frequency: 66.5 KHz typical
11. Efficiency: 75% Typically

B) PROTECTION

01. Over-Voltage: Electronically Protected via Zener Diode across output
02. Short Circuit: Electronically Protected via Hiccup unit will auto recover upon removal of fault
03. Input Protection: Input line fusing

C) SAFETY

01. Dielectric Withstand Voltage: 4242Vdc from primary to secondary
02. Touch Current: <0.25mA @ 240Vac input voltage

D) OTHER:

01. MTBF: 200,000 Hours @ 25°C ambient temperature
02. Operating Temperature: 0°C to 40°C ambient temperature
03. Humidity: 0% to 90% relative humidity
04. Storage Temperature: -40°C to 80°C
05. Cooling: Convection
06. ROHS 2: Complies with EU 2011/65/EU and China SJ/T 11363-2006

E) ENCLOSURE

01. Housing: High impact plastic, 94V0 polycarbonate, non-vented
02. Markings: Label and/or Pad Printed and/or Molded in the case
03. Enclosure dimensions: 55.4 x 52.0 x 23.5 mm
04. Ingress Protection: IPX1

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-91114-06VV-PP

May 20, 2019

DERATING CURVE

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-91114-06VV-PP

May 20, 2019

Input Configuration

Description Solder Pins for Line & Neutral, 0.64 mm square pins, 10 mm long

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-91114-06VV-PP

May 20, 2019

Output Configuration

Common output connector options:


 L Type (Coaxial
5.5x2.5mm plug)

 C Type (Coaxial
5.5x2.1mm plug)

 K Type (Coaxial
3.5x1.3mm plug)

 LL Type (5.5x2.5mm
Locking 760k type)

 CL Type (5.5x2.1mm
Locking S761k type)

 ML2 Type (Molex
housing 43025-0200)


YL3 Type (KPPX-3P)



YL4 Type (KPPX-4P)


 EJ1/2/3/4/5 (EIAJ
RC-5320A type
connectors)


MSB Type (Micro USB)


 USBC Type (USB Type
C)

 Inquire for custom
design

 For a comprehensive list of options, [click here](#)

Contact GlobTek for your specific requirements or custom solutions.

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-91114-06VV-PP

May 20, 2019

Approvals

Logo

Description



CE Mark: tested to comply with EN55022:2006/A1:2007 Class B, EN610003-2, EN610003-3 including EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6N EN61000-4-11; EMI: Complies with EN55011 CLASS B and FCC Part 15B - On label or Molded in case



CHINA SJ/T 11364-2014, China RoHS Chart: <http://en.globtek.com/globtek-rohs.php>

EFFICIENCY LEVEL



Efficiency: complies to section 301 of Energy Independence and Security Act (EISA) complies with Energy Star tier 2 (North America), ECP tier 2 (China), MEPS tier 2 (Australia), Code of Conduct (Europe)

RoHS

Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-EU (ROHS-3)

<http://www.ce-mark.com/Rohs%20final.pdf>



WEEE: Complies with EU 2012/19/EU (http://ec.europa.eu/environment/waste/weee/index_en.htm)

Mark is on the label or Molded in the case