

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-41134-06VV-x.x-W2U

June 24, 2019

## GT-41134-06VV-x.x-W2U

### Information

Model Number GT-41134-06VV-x.x-W2U

Description GT-41134-06VV-x.x-W2U, ITE Power Supply, 60601-1-4th Ed. , Wall Plug-in, Regulated Switchmode AC-DC Power Supply AC Adaptor, , Input Rating: 100-240V~, 50-60 Hz, UK BS 1363, 2 Blade w/Dummy Ground Class II, Output Rating: 6 Watts, Power rating with convection cooling (W) , 3.3-24V in 0.1V increments, Approvals: S-Mark 60950; PSE; PSE; PSE; LPS; CB 60950; CE; China RoHS; Double Insulation; Level V; RoHS; Ukraine; WEEE; EAC;

Model Picture



Agency Documents <http://www.globtek.info/certs/GT-41134-W2Z%20Fixed%20Blades/>  
CE [https://www.globtek.com/pdf/ec\\_declaration/a0O3000008UliAEAS](https://www.globtek.com/pdf/ec_declaration/a0O3000008UliAEAS)  
EC-Declaration  
RoHS/RoHS2 [https://www.globtek.com/pdf/rohs\\_cert/a0O3000008UliAEAS](https://www.globtek.com/pdf/rohs_cert/a0O3000008UliAEAS)  
Declaration  
REACH [https://www.globtek.com/pdf/iso\\_certificates/REACH.pdf](https://www.globtek.com/pdf/iso_certificates/REACH.pdf)  
Declaration  
Conflict  
Minerals <https://www.globtek.com/pdf/conflict-minerals.pdf>  
Declaration

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-41134-06VV-x.x-W2U

June 24, 2019

**Model Parameters**


|                    |  |
|--------------------|--|
| Type               | Wall Plug-in                                       |
| Technology         | Regulated Switchmode AC-DC Power Supply AC Adaptor |
| Category           | ITE Power Supply                                   |
| Input Voltage      | 100-240V~, 50-60 Hz                                |
| I/P Amps (A)       | 0.3 A  |
| Wattage (W)        | 6.0  |
| Vout Range (V)     | 3.3-24   |
| Efficiency Level   | V  |
| Ingress Protection |  |
| Size (mm)          | 41*62*32   |

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41134-06VV-x.x-W2U

June 24, 2019

ENCLOSURE

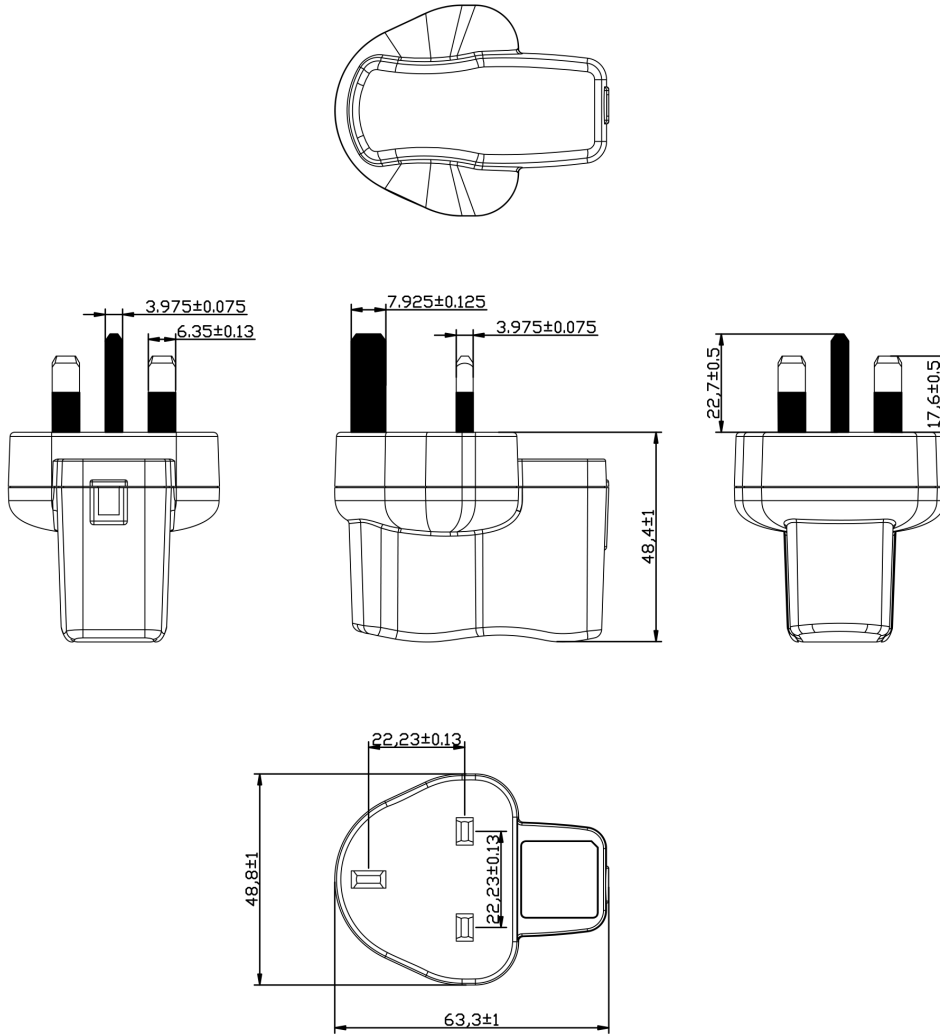

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-41134-06VV-x.x-W2U

June 24, 2019

**RATING TABLE**

| Model Number          | Voltage | Amps(A) | Watts(W) | RFQ                 |
|-----------------------|---------|---------|----------|---------------------|
| GT-41134-0603-W2U     | 3.3 V   | 1.8     | 5.94     | <a href="#">RFQ</a> |
| GT-41134-0604-W2U     | 4 V     | 1.5     | 6.00     | <a href="#">RFQ</a> |
| GT-41134-0606-1.0-W2U | 5 V     | 1.2     | 6.00     | <a href="#">RFQ</a> |
| GT-41134-0606-W2U     | 6 V     | 1       | 6.00     | <a href="#">RFQ</a> |
| GT-41134-0612-4.5-W2U | 7.5 V   | 0.8     | 6.00     | <a href="#">RFQ</a> |
| GT-41134-0612-3.0-W2U | 9 V     | 0.67    | 6.03     | <a href="#">RFQ</a> |
| GT-41134-0612-W2U     | 12 V    | 0.5     | 6.00     | <a href="#">RFQ</a> |
| GT-41134-0615-W2U     | 15 V    | 0.4     | 6.00     | <a href="#">RFQ</a> |
| GT-41134-0618-W2U     | 18 V    | 0.33    | 5.94     | <a href="#">RFQ</a> |
| GT-41134-0624-W2U     | 24 V    | 0.25    | 6.00     | <a href="#">RFQ</a> |

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41134-06VV-x.x-W2U

June 24, 2019

## SPECIFICATIONS

### A) ELECTRICAL SPECIFICATIONS:

01. Input Voltage: Specified 90-264 Vac, Nameplate rated: 100-240Vac
02. Input Frequency: Specified 47-63 Hz, Nameplate rated 50-60Hz
03. Output Regulation: +/- 5% measured at the output connector
04. Line Voltage Regulation: +/- 1% typical measured at the output connector
05. Output Ripple (Vp-p): +/-1% or 150 mV whichever is greater, measured at 20 MHz bandwidth with 0.1 uf ceramic capacitor in parallel with 10 uf electrolytic capacitor connected at the end of the output connector at nominal line
06. Turn-ON/OFF Overshoot: 5% maximum, 1 mS typical recovery time for 25% step load
07. Turn-ON Delay: 1 Second, typical
08. Hold-Up Time: 8 mS typical at nominal input voltage and full load
09. Inrush Current: 30A typical at 115VAC input and 60A typical at 230VAC input
10. Switching Frequency: 65 KHz typical

### B) PROTECTION

01. Over-Voltage: Protected Zener clamp across the output
02. Short Circuit: Protected unit will auto recover upon removal of fault
03. Input Protection: Input line fusing

### C) SAFETY

01. Dielectric Withstand Voltage: 4242Vdc from primary to secondary
02. Earth Leakage Current: <10 uA at 240Vac input voltage

### D) OTHER:

01. MTBF: 200,000 Hours @ 25°C ambient temperature
02. Operating Temperature: 0°C to 40°C ambient temperature
03. Humidity: 0% to 90% relative humidity
04. Storage Temperature: -10°C to 80°C
05. Cooling: Convection

### E) ENCLOSURE

01. Housing: High impact plastic, 94V0 polycarbonate, non-vented
02. Size: 63.31 x 48.8 x 48.4mm +/- 1.0
03. Markings: Label and/or Pad Printed and/or Molded in the case

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-41134-06VV-x.x-W2U

June 24, 2019

DERATING CURVE

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41134-06VV-x.x-W2U

June 24, 2019


### Input Configuration

Description UK BS 1363, 2 Blade w/Dummy Ground Class II

The line and neutral pins have a rectangular cross section 6.35 mm by 4.0 mm, 17.7 mm long and with centres 22.2 mm apart. The protective-earth pin is a rectangular cross section 8.0 mm by 4.0 mm, 22.3 mm long and with a centre line 22.2 mm from the line/neutral pin centre line. The dimensions were originally specified in decimal inches with asymmetric tolerances and redefined as minimum and maximum metric dimensions in BS 1363:1984.

Dimensions are chosen to provide safe clearance to live parts. The distance from any part of the line and neutral pins to the periphery of the plug base must be not less than 9.5 mm. This ensures that nothing can be inserted alongside a pin when the plug is in use, and helps keep fingers away from the pins. The minimum insertion distance from the face of the socket-outlet to the first point of contact with a live part is 9.6 mm.

The "Dummy" longer earth pin ensures that the earth path is connected before the live pins, and remains connected after the live pins are removed. The earth pin is too large to be inserted into the line or neutral sockets by mistake.

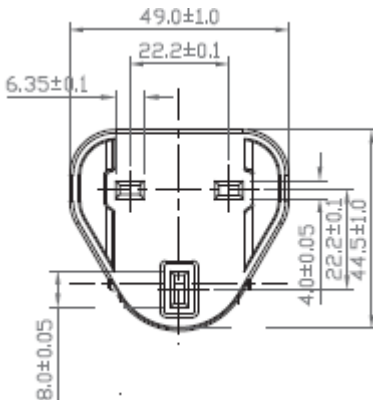

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41134-06VV-x.x-W2U

June 24, 2019

**Output Configuration**

Common output connector options:


 L Type (Coaxial  
5.5x2.5mm plug)

 C Type (Coaxial  
5.5x2.1mm plug)

 K Type (Coaxial  
3.5x1.3mm plug)

 LL Type (5.5x2.5mm  
Locking 760k type)

 CL Type (5.5x2.1mm  
Locking S761k type)

 ML2 Type (Molex  
housing 43025-0200)


YL3 Type (KPPX-3P)



YL4 Type (KPPX-4P)


 EJ1/2/3/4/5 (EIAJ  
RC-5320A type  
connectors)


MSB Type (Micro USB)


 USBC Type (USB Type  
C)

 Inquire for custom  
design

 For a comprehensive list of options, [click here](#)

Contact GlobTek for your specific requirements or custom solutions.













Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41134-06VV-x.x-W2U

June 24, 2019

## Approvals

| Logo  | Description  |
|---|--|
| No Logo   | Applicable IEC 60950-1:2005 (Second Edition) + A1:2009 + A2:2013   |
|                             | CE Mark: tested to comply with EN55022:2006/A1:2007 Class B, EN610003-2, EN610003-3 including EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6N EN61000-4-11; EMI: Complies with EN55011 CLASS B and FCC Part 15B - On label or Molded in case  |
|                             | CHINA SJ/T 11364-2014, China RoHS Chart: <a href="http://en.globtek.com/globtek-rohs.php">http://en.globtek.com/globtek-rohs.php</a>   |
|                             | Certification # TC RU AR46.B.75423 Custom Union of Russia, Belarus and Kazakhstan  |
|                             | Indoor Use Only - Mark is on the label or Molded in the case   |
| <br>GlobTek, Inc.          | JAPAN TUV R-PSE, Cert. No. JD 50315169, to J60950-1(H26) , J55022(H22),[15V or less]. Please reference the following website for guidelines on PSE regulations:<br><a href="http://en.globtek.com/importing-ite-and-medical-power-supplies-ac-adaptors-to-japan/">http://en.globtek.com/importing-ite-and-medical-power-supplies-ac-adaptors-to-japan/</a> |
| <br>GlobTek, Inc.         | JAPAN TUV R-PSE, Cert. No. JD 50315866, to J60950-1(H26) , J55022(H22),[15V or less]. Please reference the following website for guidelines on PSE regulations:<br><a href="http://en.globtek.com/importing-ite-and-medical-power-supplies-ac-adaptors-to-japan/">http://en.globtek.com/importing-ite-and-medical-power-supplies-ac-adaptors-to-japan/</a> |
| <br>GlobTek, Inc.         | JAPAN TUV R-PSE, Cert. No. JD 50315866, to J60950-1(H26) , J55022(H22),[DC15V?30V]. Please reference the following website for guidelines on PSE regulations:<br><a href="http://en.globtek.com/importing-ite-and-medical-power-supplies-ac-adaptors-to-japan/">http://en.globtek.com/importing-ite-and-medical-power-supplies-ac-adaptors-to-japan/</a>   |
| <b>EFFICIENCY LEVEL</b>  | Efficiency: complies to section 301 of Energy Independence and Security Act (EISA) complies with Energy Star tier 2 (North America), ECP tier 2 (China), MEPS tier 2 (Australia), Code of Conduct (Europe)   |
| LPS   | Limited Power Source   |
| RoHS  | Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-EU (ROHS-3)<br><a href="http://www.ce-mark.com/Rohs%20final.pdf">http://www.ce-mark.com/Rohs%20final.pdf</a>  |
| <br>Intertek             | S-Mark Certificate EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011+A2:2013<br><a href="http://www.intertek.com/marks/s/">http://www.intertek.com/marks/s/</a>  |
| <br>10276                 | Ukraine UKRSepr (Document: <a href="http://www.globtek.com/html/iso_certificates/GT_Ukraine.pdf">www.globtek.com/html/iso_certificates/GT_Ukraine.pdf</a> )  |
|                           | WEEE: Complies with EU 2012/19/EU ( <a href="http://ec.europa.eu/environment/waste/weee/index_en.htm">http://ec.europa.eu/environment/waste/weee/index_en.htm</a> )<br>Mark is on the label or Molded in the case  |